


maximum free fall height (EN 1176):
145 cm

recommended ground surface:
40 cm of 2/8 mm pea gravel
for fall protection, coarse sand,
wood chips or HIC- tested synthetics

protective area:
no obstacles in swing direction

when built in solid shock absorbing
ground (usually synthetic coating)
it is possible to reduce the fall protection
length by 50 cm each side

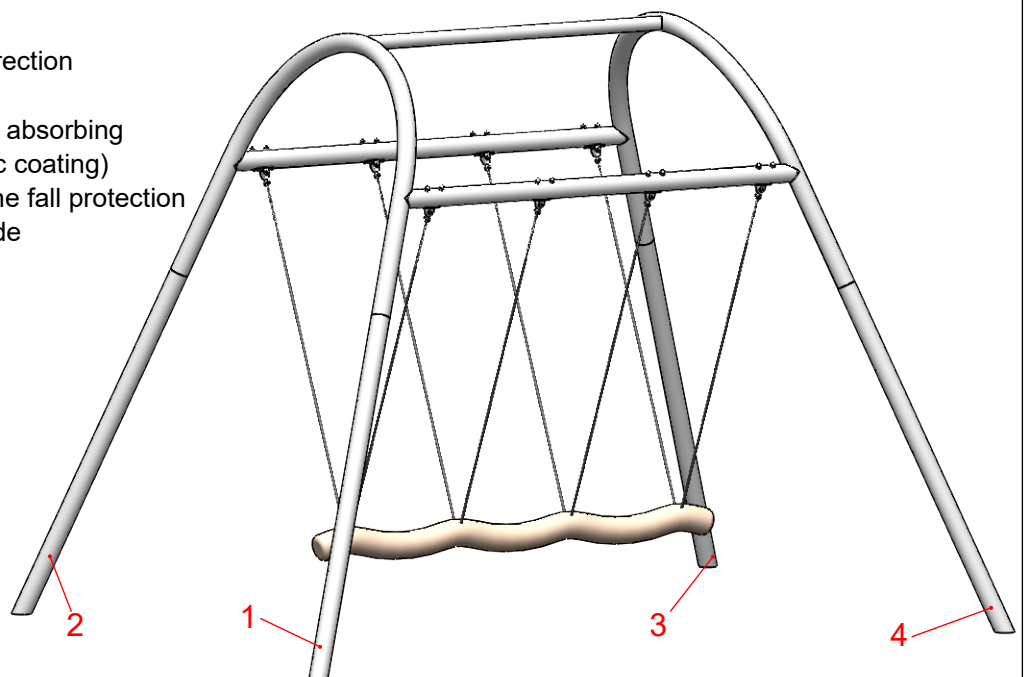

ASSEMBLY DRAWING


Bearbeiter: Steffen Miksch

Datum: 18.02.2021

Page: 1/2

Spiel-Bau GmbH
Alte Weinberge 21 - D-14776 Brandenburg / Havel
Tel.: 03381 / 26 14 0 - Fax.: 03381 / 26 14 18

Rope Swing 1
Order-No.: 6.5176-E

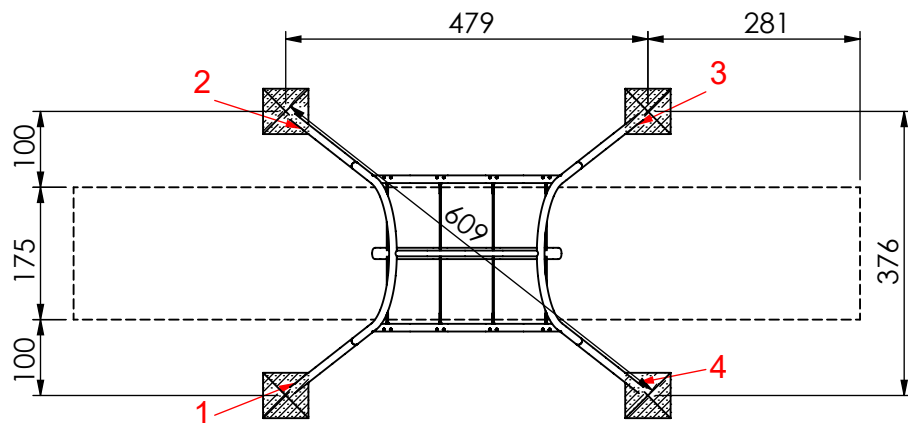



Scale 1:100

Foundation: In-situ concrete C25/30

- Posts 1 to 4:
each 60x60x40 cm look at detail a1-E)

Foundation detail - post a1-E)

Scale 1:25

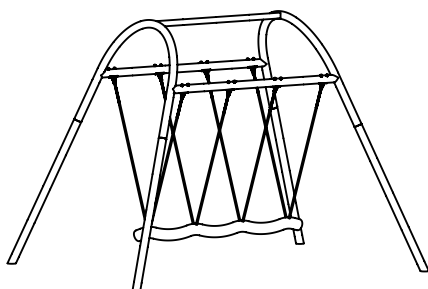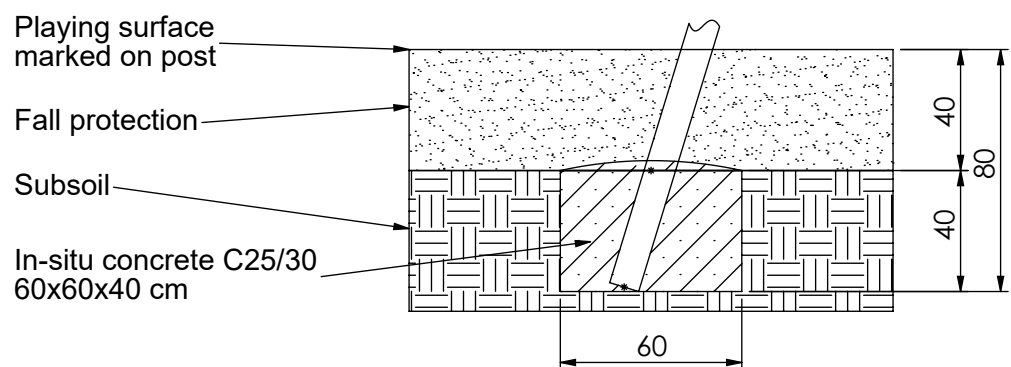

ASSEMBLY DRAWING

Bearbeiter: Steffen Miksch

Datum: 18.02.2021

Blatt: 2/2

Spiel-Bau GmbH
Alte Weinberge 21 - 14776 Brandenburg / Havel
Tel.: 03381 / 26 14 0 - Fax.: 03381 / 26 14 18

Rope Swing 1
Best.-Nr.: 6.5176-E